



Main Features

- ◆ 10.4" SVGA TFT LCD
- ◆ High brightness: 250cd/m²
- ◆ OSD button, Support Chinese & English Menu
- ◆ Touch panel optional
- ◆ Slim design, only 56mm thickness
- ◆ Steel Frame
- ◆ Support panel / wall mounting




Specification

System	
Input signal	RGB (VGA)
OSD Button	Brightness, Contrast, & Position Auto Adjust
Supporting System	MS DOS, Windows®2000, Windows® XP, Linux Redhat8.0
contracture	
Frame Material	stainless steel, aluminum alloy, steel
Color of front frame	Black (optional)
Mounting method	Panel / Wall mounting
Size	Backside Frame: 265.5x207.3x45.6mm, Front Frame: 285.5x226.5x49.6mm
Packing size	
Weight	
Display	
Display type	10.4" TFT
Best Resolution	800X600
Display color	262K
Brightness	250Cd/m ²
View angle	110 (H) × 80 (V)
BL MTBF	20,000HR
Environment	
Operation temperature	0°C ~ 50°C
Storage temperature	-20°C ~ +60°C
Working humidity	10% - 90% RH
Power	
External AC/DC	Input: +12V@4A, Built In: +24V@1.76A
Touch panel	
Touch Panel Type	4 wire resistance, 8 wire resistance
Resolution	2048x2048
Light transmittance	75%
Lifetime	1 million times
Operation system	MS DOS, Windows®2000, Windows®XP, Linux Redhat8.0

10.4" Industrial PC

Drawing

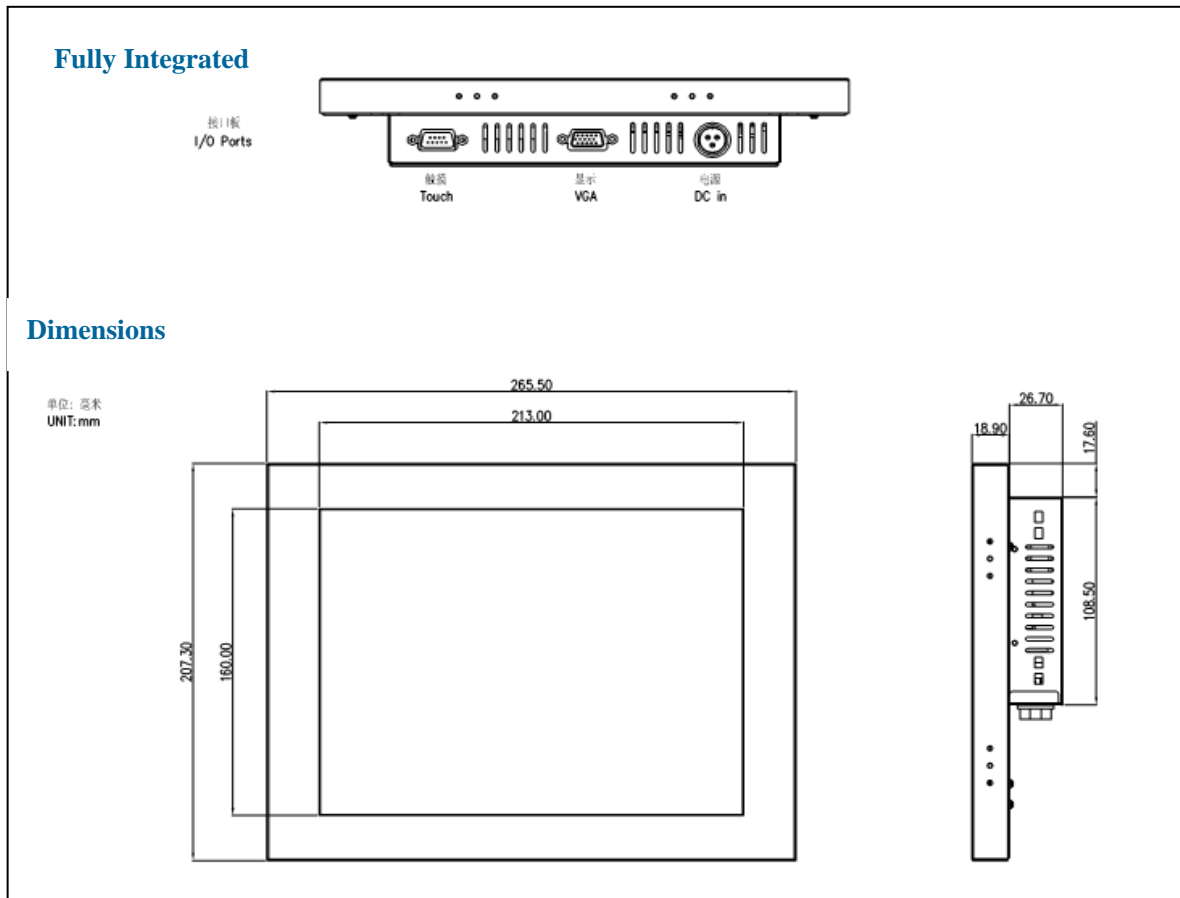

Part No.

Part No	Frame	Touch panel	Power supply
GL-1040	Open frame	USB/RS-232	+12V@4A/+24V@1.76A
GL-1042	Stainless front frame	USB/RS-232	+12V@4A/+24V@1.76A
GL-1043	Aluminum alloy front frame	USB/RS-232	+12V@4A/+24V@1.76A

Packing list

Items	Quantity
AC/DC +12V@5A	1
1.5 meter USB Cable	1
1.5 meter Serial cable	1
Embedded mounting buckle	4
Driver disc	1

Optional

Item	Remark
Touch panel	AMT 4wire/8wire
Touch panel	TOUCHKIT4wire/8wire
Tempered glass	2mm height Light transmittance