



Main Features

- ◆ 15.1" XGA TFT LCD
- ◆ High brightness: 350cd/m²
- ◆ OSD button,
Support Chinese & English Menu
- ◆ Touch panel optional
- ◆ Slim design, only 50mm thickness
- ◆ Steel Frame
- ◆ Support panel / wall mounting




规格

System	
Input signal	RGB (VGA)
OSD Button	Brightness, Contrast, & Position Auto Adjust
Supporting System	MS DOS, Windows®2000, Windows® XP, Linux Redhat8.0
Constructure	
Frame Material	stainless steel, aluminum alloy, steel
Color of front frame	Black (optional)
Mounting method	Panel / Wall mounting
Size	Backside Frame: 366x280x50mm, Front Frame: 380x296x56mm
Packing size	
Weight	
Display	
Display type	15.0" TFT
Best Resolution	1024x768
Display color	16.2M
Brightness	350Cd/m ²
View angle	120(H)×100(V)
BL MTBF	20,000 HR
Environment	
Operation temperature	0°C ~ 50°C
Storage temperature	-20°C ~ +60°C
Working humidity	10% - 90% (无凝结)
Power	
External AC/DC	Input: +12V@4A, Built In: +24V@1.76A
Touch panel	
Touch Panel Type	4 wire resistance, 8 wire resistance
Resolution	2048x2048
Light transmittance	75%
Lifetime	1 million times
Operation system	MS DOS, Windows®2000, Windows® XP, Linux Redhat8.0

15.1" Industrial PC

Drawing

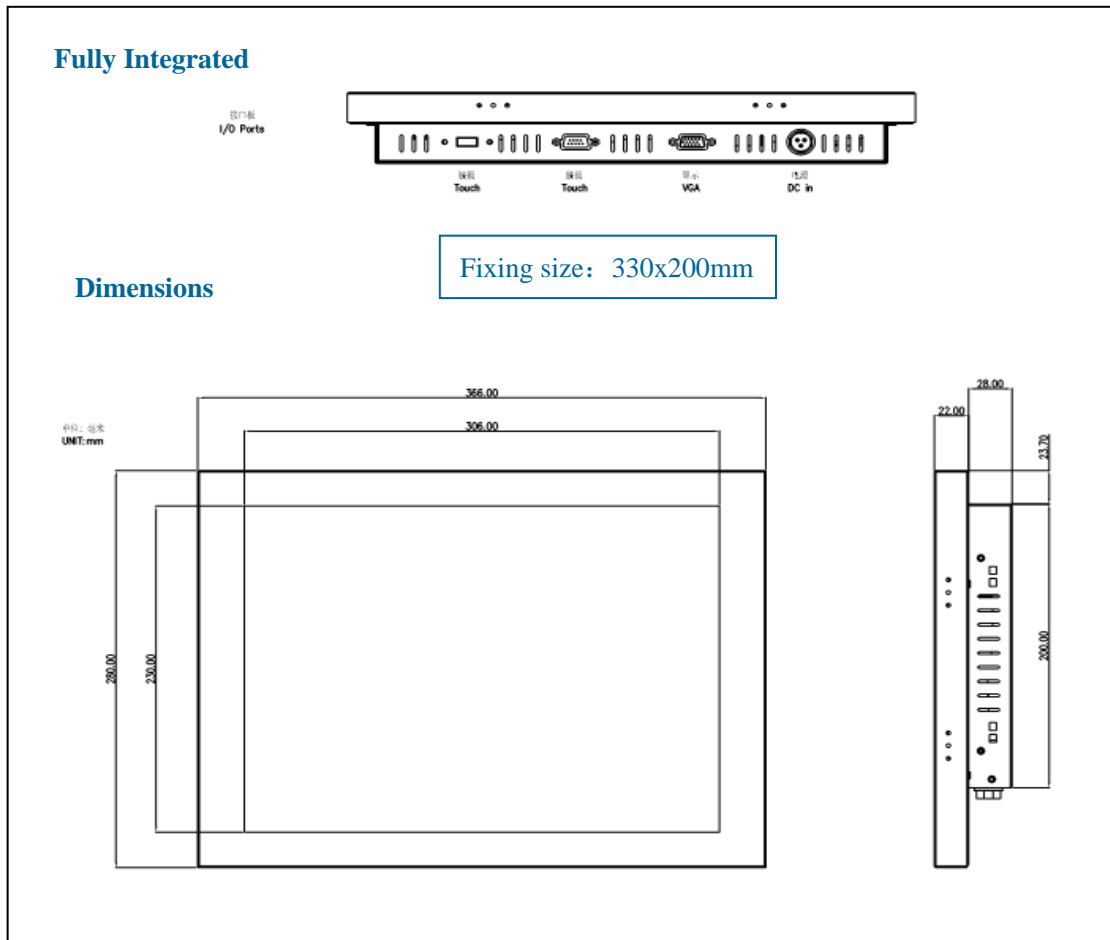

Part No.

Part No	Frame	Touch panel	Power supply
GL-1510	Open frame	USB/RS-232	+12V@5A/+24V@1.76A
GL-1512	Stainless front frame	USB/RS-232	+12V@5A/+24V@1.76A
GL-1513	Aluminum alloy front frame	USB/RS-232	+12V@5A/+24V@1.76A

Packing list

Items	Quantity
AC/DC +12V@5A	1
1.5 meter USB Cable	1
1.5 meter Serial cable	1
Embedded mounting buckle	4
Driver disc	1

Optional

Item	Remark
Touch panel	AMT 4wire/8wire
Touch panel	TOUCHKIT4wire/8wire
Tempered glass	2mm height Light transmittance